



BC/BL/BLR 2604



Important notice

Every effort is made to ensure the accuracy of our product information; however, we accept no responsibility for errors or omissions including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. We shall not be liable for errors contained herein or for incidental consequential damages in connection with the furnishing, performance, or use of this material.

Specifications or version may be subject to change without notice. The actual specification and version are based on the product delivered.

Introduction

Scanning a series of programming bar code labels can configure the scanner.

The scanner must be properly powered before programming.

During the programming mode, the scanner will acknowledge a good and valid reading with a short beep. It will give long beeps for either an invalid or bad reading.

2604 Programming guide

This document is to be used with Baracoda Barcode Scanners :

BC2604

BL2604

BLR 2604

Important notice:

Every effort is made to ensure the accuracy of our product information; however, we accept no responsibility for errors or omissions including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. We shall not be liable for errors contained herein or for incidental consequential damages in connection with the furnishing, performance, or use of this material.

Specifications or version may be subject to change without notice. The actual specification and version are based on the product delivered.

INTRODUCTION

Scanning a series of programming bar code labels can configure the scanner.

The scanner must be properly powered before programming.

During the programming mode, the scanner will acknowledge a good and valid reading with a short beep. It will give long beeps for either an invalid or bad reading.

PROGRAMMING OPTIONS

Programmable options are divided into 2 groups. The first group includes the options that show the general behaviour of the scanner. The second group sets the decoding parameters for each barcode symbology.

SCANNING INSTRUCTIONS

The Programming Guide barcodes should be scanned with a full charged set of batteries.

The BLR2604 scanning distance is 60 cm.

Table of content

1	Default parameters.....	3
1.1	Default values of operating parameters	3
1.2	Predefined barcode identifiers	3
1.3	Default values of decoding parameters	3
2	Program procedure using barcode menus	4
3	Set all defaults.....	5
4	General configuration	6
4.1	Scanning mode selection.....	6
4.2	Good read beeper tone selection.....	6
4.3	Sound duration.....	6
5	Symbologies	7
	Reading code selection	7
	Code 9 parameters setting.....	9
	Interleaved 2 of 5 parameters setting	9
	Chinese post code parameters setting	10
	Codabar/Monarch parameters setting.....	10
	UPC/EAN/JAN parameters setting	11
	UPC/EAN/JAN parameters settings (Cont'd)	13
	Code 128 parameters setting	13
	UCC/EAN128 parameters setting	13
	Industry 25 parameters setting.....	14
	Msi/Plessy setting.....	14
	Italian pharmacy parameters setting	15
	Barcode length setting	15
	ISBN/ ISSN conversion	16
6	Data editing	17
6.1	Prefix and suffix	17
6.2	Barcode identifier code selection	17
6.3	Barcode identifier code setting	17
7	Code 39 full ASCII barcode table.....	19

Default parameters

This table gives the default settings of all the programmable parameters. The default settings will be restored whenever the "Reset" programming label is scanned and the laser scanner is in programming mode.

1.1 Default values of operating parameters

Function	Default Values
Scanning Mode Selection	Trigger mode
Header and Trailer	None
Good Read Beeper Tone Selection	2.3KHz/50 msec (medium)
Code Identifier Transmitting	Disable

1.2 Predefined barcode identifiers


Function	Default Values
Code 39 Barcode Identifier Code	M
ITF 2 of 5 Barcode Identifier Code	I
Chinese Post Code Identifier Code	H
UPC-E Barcode Identifier Code	E
UPC-A Barcode Identifier Code	A
EAN-13 Barcode Identifier Code	F
EAN-8 Barcode Identifier Code	FF
Coda bar Barcode Identifier Code	N
Code 128 Barcode Identifier Code	K
Code 93 Barcode Identifier Code	L
MSI Barcode Identifier Code	P
Industry 2 of 5 Identifier Code	R
IATA Identifier Code	T

1.3 Default values of decoding parameters

Function	Code	Default Value
Reading codes Selection	Code 39	Enable
	ITF 2 of 5	Enable
	Chinese Post Code	Disable
	UPC/EAN/JAN	Enable
	Codabar	Enable
	MSI/PLESSY	Disable
	Code 128	Enable
	Code 93	Enable
	ITAT	Disable
	EAN-128	Disable
	Industry 2 of 5	Disable
	Italian Pharmacy	Disable
	ISSN/ ISBN	Disable
Code 39	Codes	Standard
	Start/stop characters	Not transmitting
	Check digit	Disabled
Interleaved 2 of 5	Length	6-32 digits
	Check digit	Disable

Chinese Post Code	Length	8~32digits
	Check digit	Transmit
UPC/EAN/JAN	Format	All
	Addendum	Disable
	UPC-E=UPC-A	Disabled
	UPC-A leading digit	Transmit
	UPC-A check digit	Transmit
	UPC-E leading digit	Transmit
Coda bar	UPC-E check digit	Transmit
	Type	Standard
	Start/stop characters	A, B, C, D
Code 128	Length	6~32 digits
	FNC 2 append	Disable
MSI	Length	Variable
	Check digit	Double check but not transmit
Italian Pharmacy	Transmit "A" Character	Not transmitting
Industry 2 of 5	Length	6~32 digits


2 Program procedure using barcode menus

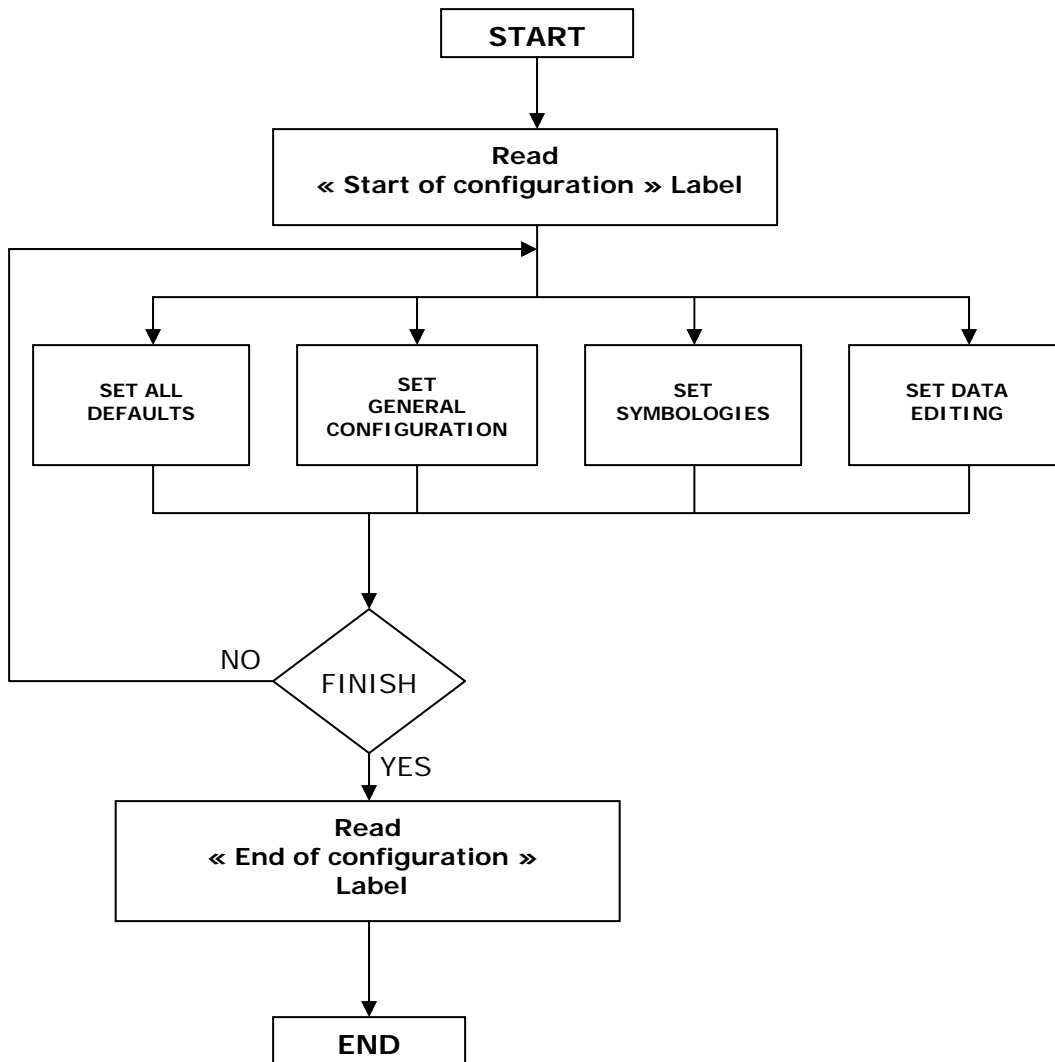

3 Set all defaults




Start of Configuration

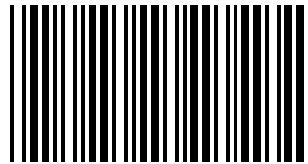

— — — —
Default Settings

The reading of the "Default settings" label turns all the parameters back to default settings.

When you intend to turn your scanner back to default parameter, please scans the "Start of configuration" label first, then scan "Default settings" label and finally scan the "End of configuration" label.

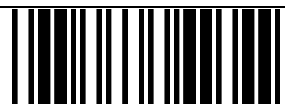

End of Configuration

4 General configuration




Start of Configuration


4.1 Scanning mode selection

The scanner becomes inactive as soon as the data is transmitted. It must be triggered to become active again.

In auto scan mode, the scanner is still active after the data is transmitted, but the successive transmission of the same bar code is not allowed when the trigger switch is pressed again.

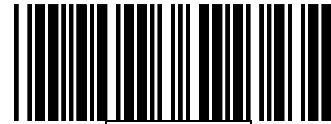


Trigger mode

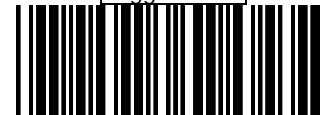


Auto scan mode

4.2 Good read beeper tone selection


You can use this option to set frequency and / or duration of the buzzer after successful reading.

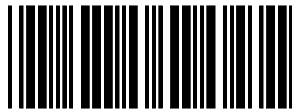

Low

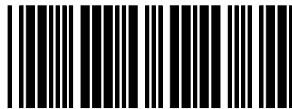

High

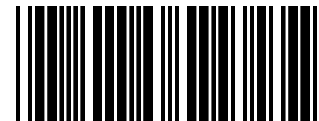


Medium



Disable

4.3 Sound duration

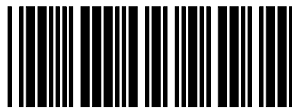

long(120 ms)



Short(20 ms)



Medium(50 ms)



Very short(5 ms)



End of Configuration

5 Symbologies



Start of Configuration


Reading code selection



Code 39 Enable




Code 39 Disable

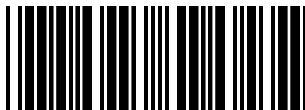

Codabar Enable



Codabar Disable

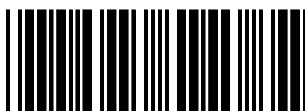

UPC/ EAN/ JAN Enable




UPC/ EAN/ JAN Disable



ITF 2 of 5 Enable



ITF 2 of 5 Disable

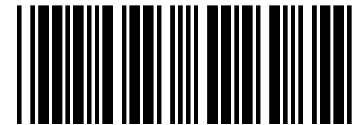

Chinese Post Code Enable




Chinese Post Code Disable



Code 128 Enable



Code 128 Disable

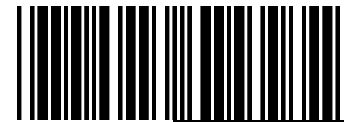


Code 93 Enable



Code 93 Disable



EAN-128 Enable

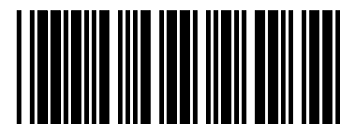


EAN-128 Disable



MSI Enable




MSI Disable

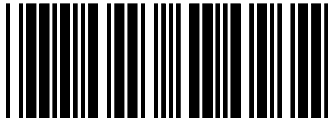

IATA Enable



IATA Disable

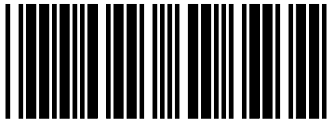


INDUSTRY 25 Enable




INDUSTRY 25 Disable



Italian Pharmacy Enable

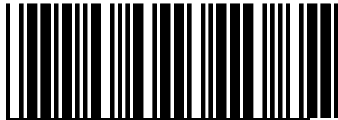

Italian Pharmacy Disable

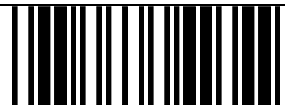

End of Configuration




Start of Configuration

Code 9 parameters setting

CHARACTER SET




Standard Code 39

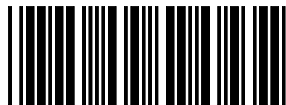


Full ASCII Code 39

START/STOP CHARACTER TRANSMISSION

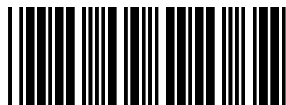


Yes

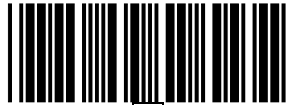


No


CHECK DIGIT

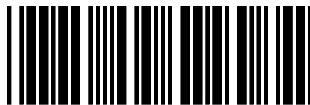

Calculate and Transmit

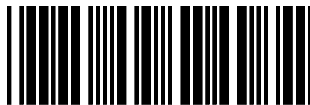

Calculate but not Transmit

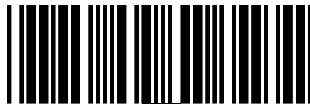

No

CONCATENATION





Enable




Disable

Interleaved 2 of 5 parameters setting


Examples: Felting length 4 to 8 digits
LENTGTH

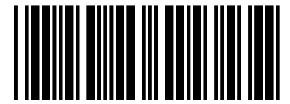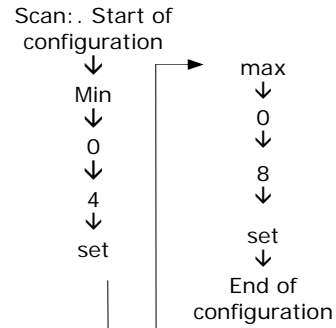

MAX

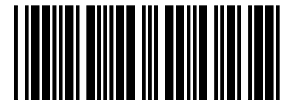

Min

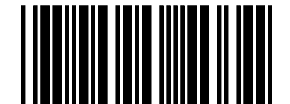

Set

CHECK DIGIT



No



Calculate and Transmit



Calculate but not Transmit




End of Configuration




Start of Configuration

Chinese post code parameters setting

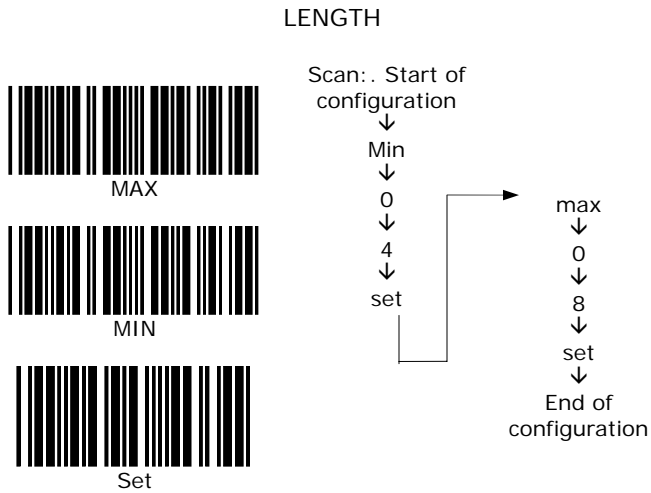

Codabar/Monarch parameters setting


START/ STOP CHARACTER TRANSMISSION

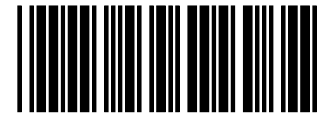


No



A, B, C, D

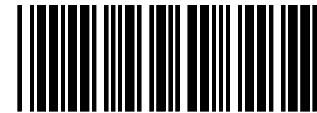


DC1~DC4

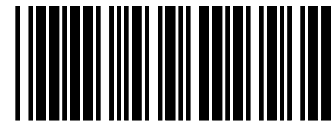

a/ t, b/ n, c/ *, d/ e

CONCATENATION

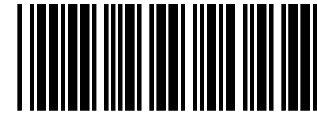

Enable



Disable

CHECK DIGIT



NO



Calculate and Transmit



Calculate but not Transmit





End of Configuration




Start of Configuration

UPC/EAN/JAN parameters setting


FORMAT :

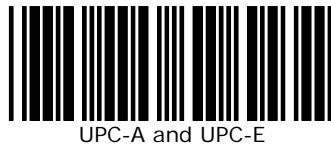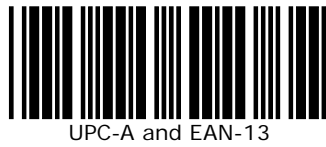


ADDENDUM :

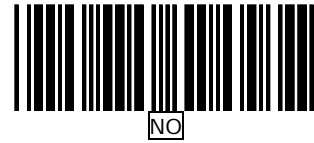

FORCE UPC-E TO UPC-A FORMAT

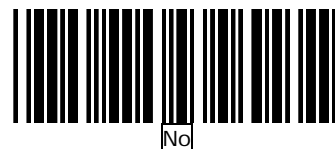



FORCE UPC-A TO EAN-13 FORMAT

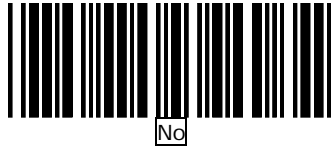


TRANSMIT UPC-E LEADING CHARACTER



TRANSMIT UPC-A LEADING CHARACTER

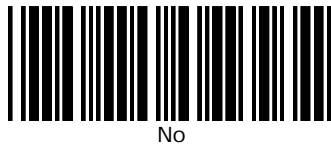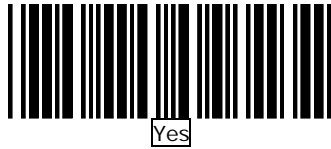

TRANSMIT UPC-A CHECK DIGIT

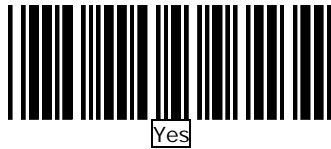




Start of Configuration

UPC/EAN/JAN parameters settings (Cont'd)

TRANSMIT UPC-E CHECK DIGIT



Yes

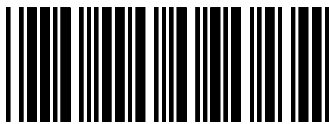

No

TRANSMIT EAN-13 CHECK DIGIT



Yes




No

TRANSMIT EAN-8 CHECK DIGIT




Yes

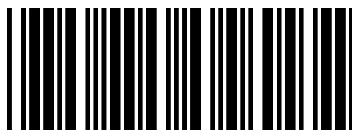

No

Code 128 parameters setting

FNC 2 CONCATENATION

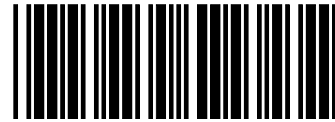


Enable




Disable


CHECK DIGIT

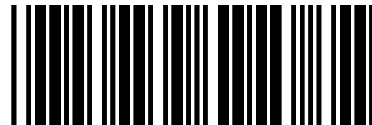

No

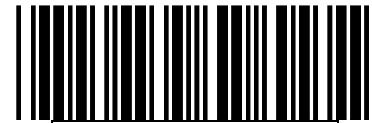


Calculate but not Transmit

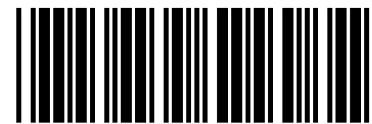


Calculate and Transmit

UCC/EAN128 parameters setting

The character FNC1 can be transmitted or not using these codes.

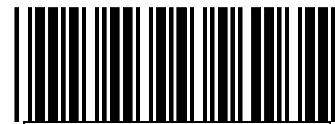

FNC1 Character Transmitted

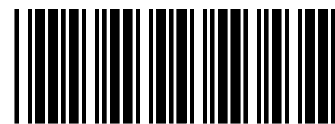

FNC1 not Transmitted




End of Configuration




Start of Configuration

Industry 25 parameters setting


Examples: Felting length 4 to 8 characters

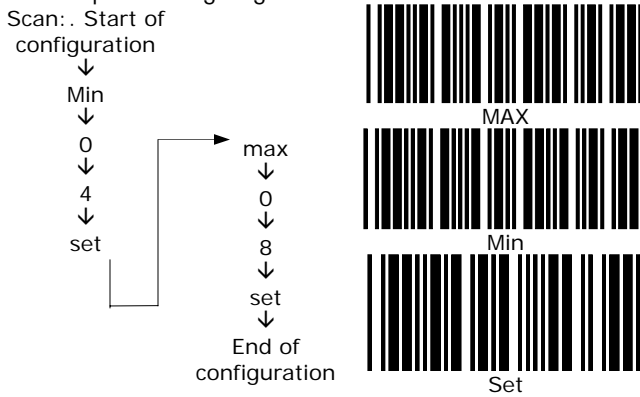


Msi/Plessey setting

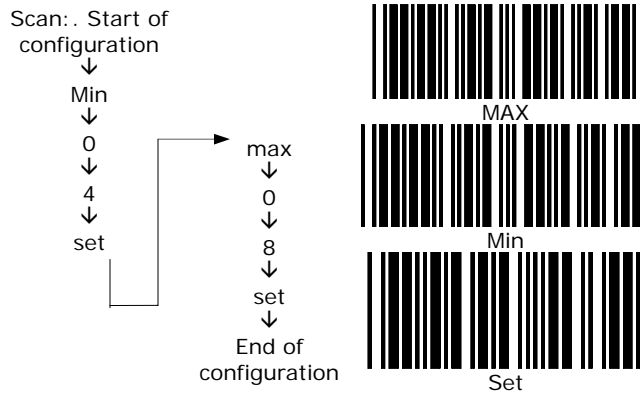


Double Check digit

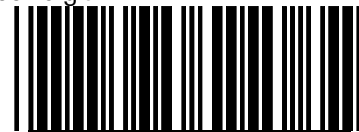

Calculate but not Transmitted

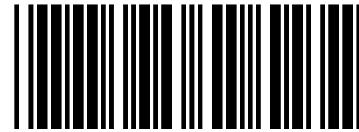


No

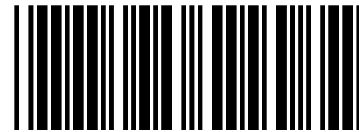

Calculate but only first one Transmitted



Calculated and both Transmitted

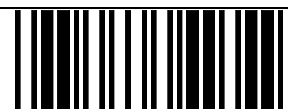


End of Configuration




Start of Configuration

Italian pharmacy parameters setting

TRANSMIT "A" CHARACTER

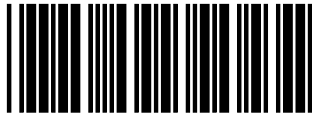


Yes

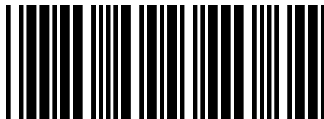


No

Barcode length setting

CODE 39 LENGTH SETTING

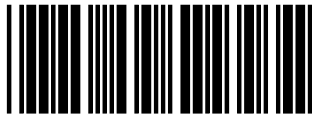


MAX

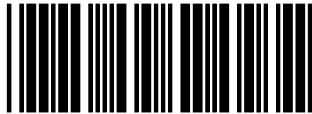


MIN

CODE 93 LENGTH SETTING

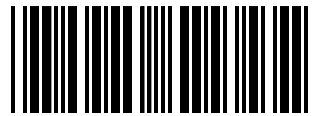

MAX

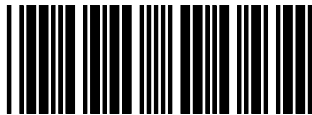

MIN

CODE 128 LENGTH SETTING



MAX



MIN

CODABAR LENGTH SETTING




MAX



MIN



SET

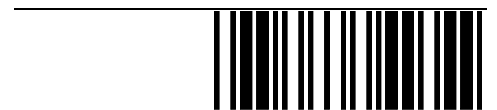


End of Configuration




Start of Configuration

ISBN/ ISSN conversion


The function converts the UPC/EAN codes appearing on books and magazine not ISBN/ISSN format.

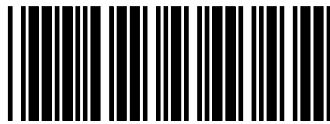

ACTIVE ISBN/ ISSN

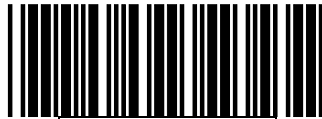

INACTIVE ISBN/ ISSN

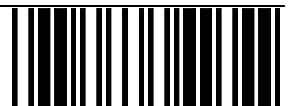

End of Configuration

6 Data editing




Start of Configuration

6.1 Prefix and suffix

This option allows you to append a prefix and/or a suffix to every message transmitted. There is no restriction in selecting prefix or suffix characters as far as the sum of the lengths of prefix and suffix is not greater than 10 digits.


You must enable prefix/suffix with the BaracodaManager previously to configure prefix and/or suffix (see 2604 protocol or BaracodaManager document)

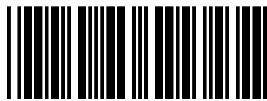

Prefix



Suffix

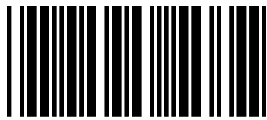

Set

1. Select either prefix or suffix you are going to program by scanning the corresponding label
2. Scan the character(s) you want from the enclosed ASCII table to set as prefix or suffix (be sure to enable full ASCII code 39 option before you start).
3. Read the "Set" label to set your choice into memory.

6.2 Barcode identifier code selection

The scanners can transmit max.2-digit barcode identifier code for different types of barcodes. Use the labels to choose transmit or not transmit predefined barcode identifier code (ID's are listed on section 1):



Enable




Disable


6.3 Barcode identifier code setting

Each of the series type scanners can set max.2 digits as barcode identifier code according to different barcode. The procedure is as follows:


1. Scan "Start of configuration" label
2. Scan "Barcode identifier setting code" label.
3. Scan the new code mark from ASCII table (max. two digits). For example, if one "AB" want for code mark then scan "A" and "B".
4. Scan "Set" label.
5. Scan "End of configuration" label.

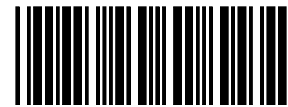


UPC-E

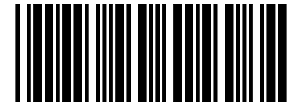


UPC-A

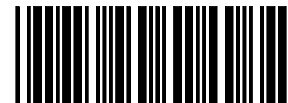

EAN-13

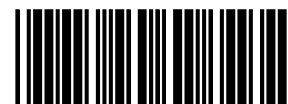


EAN-8

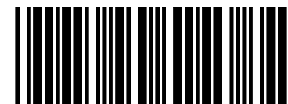


Chinese post code




ITF 2 OF 5

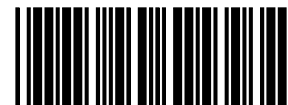


Coda bar

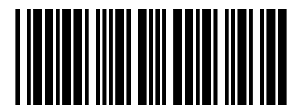

Code 39

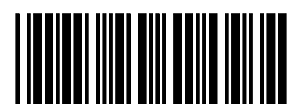

Code 128

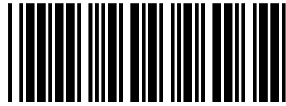

Code 93



MSI




INDUSTRY 25



IATA



Set

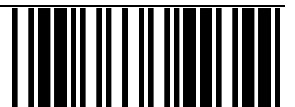


End of Configuration

7 Code 39 full ASCII barcode

table



Start of Configuration



NUL



SOH
(Ins)



STX (Del)



ETX (Home)



EOT (End)



LF (Enter)(num)



VT (Right)



FF (PgUp)



ENQ (Up)



ACK (Down)



BEL (Left)



BS (Backspace)



HT (TAB)



DLE 5 (num)



DC1 (F1)




DC2 (F2)



CR (Enter)



SO (PgDn)




SI shift(L)



SYN (F6)



ETB (F7)



CAN (F8)



EM (F9)




SUB (F10)




ESC (F11)



DC3 (F3)



DC4 (F4)



NAK (F5)



GS (ESC)



RS Ctl (L)



US Alt (L)




SP



!



\"



FS (F12)



\$



%



&



'



(




)



*



2



#



+



,



-



.



/




0



1



:



3




4



5




6




7




8



9



B



C



D



;




<




=




>

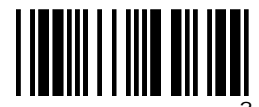


?

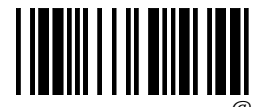


@

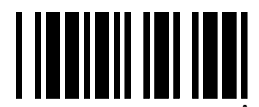

A

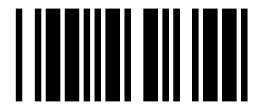


I

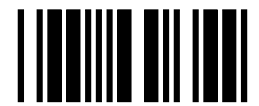

J




K




E




F



G



H



P



Q



R



S



T




U



L



M



N



O



W



X



Y



Z



[



\




V



^



_



`



a



b



c



d



l



m




j



e



f

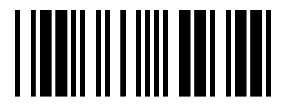

g



h



i



j



k



s



t




n




u



o



v




p




w




q



x




r




y



z



}




{



~



|



DEL



End of Configuration