



## ScanPal® 2

### Features

- **128 x 64 dot Graphic LCD Display (backlit)**
- **CCD or Laser scan engine options**
- **1 MB for programs and 1 MB SRAM for data**
- **RS232, KBW, Infrared & IrDA interfaces**
- **Alkaline or NiMH rechargeable batteries**
- **Application generator and download software**



**The ScanPal 2** is a portable data collection terminal with elegant styling. It is designed to provide high performance for all-day, everyday use. It is supported by a rich set of development tools, including 'C', 'BASIC' and a Windows-based application generator.

With its integrated Laser/LRCCD barcode scanning unit, the ScanPal 2 is ideal for inventory control, work-in-process tracking, shop floor management, asset tracking, meter reading, warehousing and distribution operations.



### Accessories:

- Download/Charger Cradle.
- Dual battery pack charger (incl power supply).
- IR Transceiver.
- Protective case.
- KBW interface cable.
- Basic & 'C' development tools.



# ScanPal® 2

## OPERATIONAL

CPU	16-bit CMOS, low power consumption
Program memory	1 MB flash memory
Data memory	1 MB SRAM
Display	128 x 64 graphic dots FSTN with LED back-lit
Keypad	21 rubber keys
Indicator	Buzzer – Programmable, 1 KHz to 4KHz
	LED – Dual-color, green and red
Laser Scanner	Light source – Visible Laser diode operating at $670 \pm 15$ nm.
	Scan rate – $36 \pm$ scans/sec
	Scan angle – $42^\circ$ nominal
	Depth of field – 5 cm - 95 cm, depends on bar code resolution
CCD Range	Resolution – 0.125 mm - 1.00 mm
	Depth of field – 30 mm - 160 mm (for 0.33 mm label)
	Scan rate – 100 scans/sec
Communication	RS-232 – Transmission speed up to 115.2k bps
	IrDA – Standard 1.0 compatible, up to 115.2k bps
	High speed IR – Up to 115.2k bps transmission rate
Programming Language	'C', 'BASIC', and a Windows-based Application Generator

## MECHANICAL

Length	145 mm
Width	63 mm
Height	33.5 mm
Weight	180 g (including batteries)

## ELECTRICAL


Power - Battery Operation	Two AAA size removable/rechargeable batteries
Power - Backup Battery	3.0V, 7.0mAh, rechargeable NiMH battery
Operation	Over 100 hours (with Alkaline batteries)

## ENVIRONMENTAL


Operating Temperature	-20°C to 60°C
Storage Temperature	-30°C to 70°C
Humidity	Non-condensing 5 % to 95 %
Shock resistance	1.2m drop onto concrete
EMC regulation	FCC class-A, CE and C-Tick approved

KBW cable, High speed IR Transceiver, Protective case, Dual battery pack charger, Download/Charger Cradle

## RS-232 and IrDA Connection

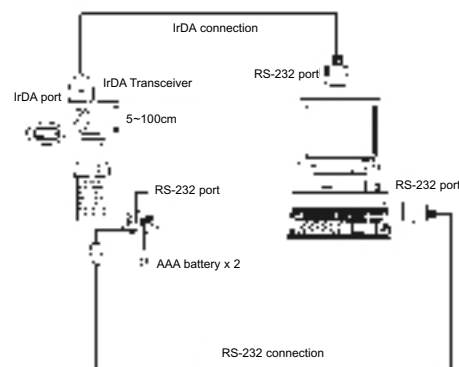

## Dimensions

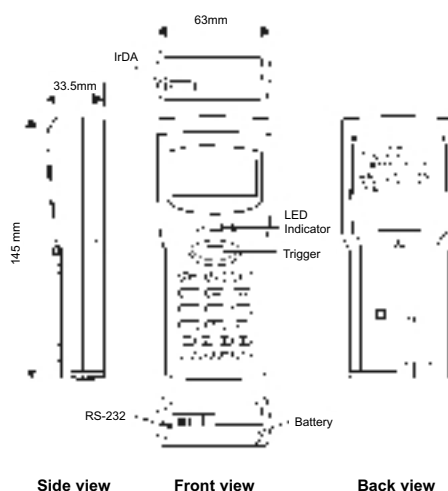

Specifications subject to change without notice.  
Copyright June 2001.  
Metrologic, All rights reserved.

**Metrologic Instruments GmbH** | Dornierstrasse 2 | 82178 Puchheim | Germany

Tel: +49 (0) 89 89 019 0 | Fax: +49 (0) 89 89 019 200 | Email: [info@europe.metrologic.com](mailto:info@europe.metrologic.com) | Homepage: [www.europe.metrologic.com](http://www.europe.metrologic.com)

**Europe Middle East Africa**  
Metrologic Instruments GmbH  
Tel: +49 (0) 89 89 019 0  
Fax: +49 (0) 89 89 019 200  
Email: [info@europe.metrologic.com](mailto:info@europe.metrologic.com)

**USA**  
Metrologic Instruments, Inc.  
Tel: 1-800-ID-METRO  
Fax: 1-856-228-6673  
Email: [info@metrologic.com](mailto:info@metrologic.com)

**South America**  
Metrologic South America  
Tel: 5511-5505-6568  
Fax: 5511-5505-1681  
Email: [info@sa.metrologic.com](mailto:info@sa.metrologic.com)

**Brazil (only)**  
Metrologic do Brasil Ltda.  
Tel: +34 91 327 24 00  
Fax: 5511-5507-2301  
Email: [info@br.metrologic.com](mailto:info@br.metrologic.com)

**Asia**  
Metrologic Asia (Pte) Ltd.  
Tel: 65-842-7155  
Fax: 886-3-2888292  
Email: [info@sg.metrologic.com](mailto:info@sg.metrologic.com)

**China (only)**  
Metro (Suzhou) Technologies Co. Ltd  
Tel: 86-512-2572511  
Fax: 86-512-2571517  
Email: [info@cn.metrologic.com](mailto:info@cn.metrologic.com)

## EUROPEAN REGIONAL OFFICES

**France**  
Metrologic Eria France SA  
Tel: +33 (0) 1 48.63.78.78  
Fax: +33 (0) 1 48.63.24.94  
Email: [info@fr.metrologic.com](mailto:info@fr.metrologic.com)  
[www.metrologic-eria.fr](http://www.metrologic-eria.fr)

**Germany**  
Metrologic Instruments GmbH  
Tel: +49 (0) 89 89 019 0  
Fax: +49 (0) 89 89 019 200  
Email: [info@de.metrologic.com](mailto:info@de.metrologic.com)  
[www.metrologic-instruments.de](http://www.metrologic-instruments.de)

**Italy**  
Metrologic Instruments Italia Srl  
Tel: +39 0 51 6511978  
Fax: +39 0 51 6521337  
Email: [info@it.metrologic.com](mailto:info@it.metrologic.com)  
[www.metrologic.it](http://www.metrologic.it)

**Spain**  
Metrologic Eria Ibérica SL  
Tel: +34 91 327 24 00  
Fax: +34 91 327 38 29  
Email: [info@es.metrologic.com](mailto:info@es.metrologic.com)  
[www.metrologic.es](http://www.metrologic.es)

**United Kingdom**  
Metrologic Instruments UK Ltd  
Tel: +44 (0)1256 365900  
Fax: +44 (0)1256 365955  
Email: [info@uk.metrologic.com](mailto:info@uk.metrologic.com)  
[www.metrologic.co.uk](http://www.metrologic.co.uk)

**Metrologic**  
IDENTIFYING SOLUTIONS  
[www.europe.metrologic.com](http://www.europe.metrologic.com)